



RANCH FENCE PRODUCT DATA SHEET

PRODUCT DESCRIPTION

Basic Use: To help provide security and /or containment for agricultural, residential, industry, highway, institutional, recreational and utility applications.

Composition:

- Co-extruded rigid Polyvinyl Chloride (PVC) specially formulated with 11 parts per 100 TiO2 for UV resistance in outdoor applications.
- Non Chalking Compound
- Impact Resistance (ft.lbs./in. of notch) =23.5
- Tensile Strength (psi) = 6606


Materials:

- Posts are to be installed 8' on center and are available pre-routed in two, three, four and five rail systems in 1-1/2" x 5-1/2" & True 2" x 6" Heavy Duty rails with 5', 6', 6-1/2', 7', 7.5', 8' and 9' long posts.
- Custom rail spacing, number of rails and post lengths available.
- Rails are available in 1-1/2" x 5-1/2" in 16' and 8' lengths.
- Caps are available in a press-on outside design. Decorative upgrade caps available as well.
- Available in White and Tan
- Custom rail spacing available to match existing fence if needed.


WARRANTY

30 Year Non-Prorated Warranty


against manufacturing defects in workmanship and materials that result in corroding, blistering, peeling, flaking, rusting and abnormal weathering and discoloration subject to normal and proper use.

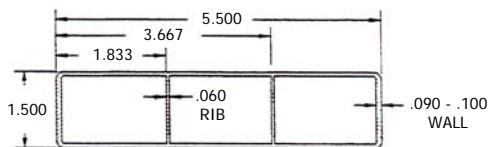

1-1/2" x 5-1/2" RAIL

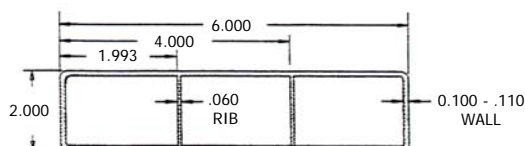

2" x 6" RAIL

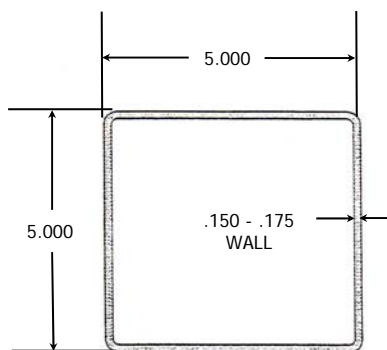

5" Post

